


Software-Update UMS 5810 Web/RRCD 3760 Web

Preparation:


- The software update occurs with a web interface, which you can enter with an Internet browser. The network address of the unit must be entered in the address field of the browser like `http://xxx.xxx.xxx.xxx` (see pict. 1). You can find this address in the menu "Set up" - "Network Config"- "Device Status".
- This new software has to be unpacked and stored in a folder of your own choice.

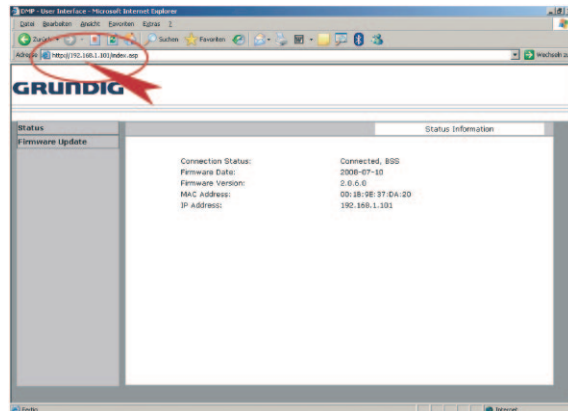


pict.1

Procedure:


Enter in this interface "Firmware Update" and confirm this with "OK". It appears the following site, which it changes to the proper update site. If you cannot see this, you also jump to this site with click to the marked link.

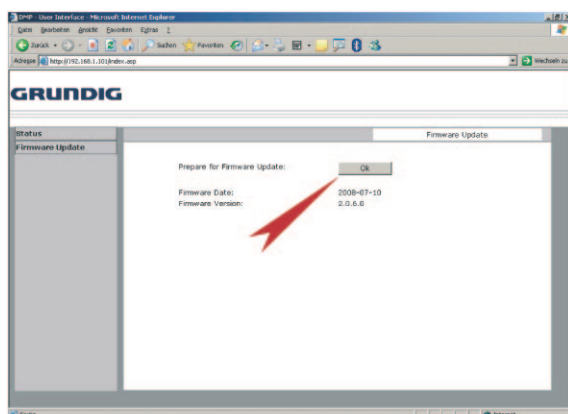

pict.2

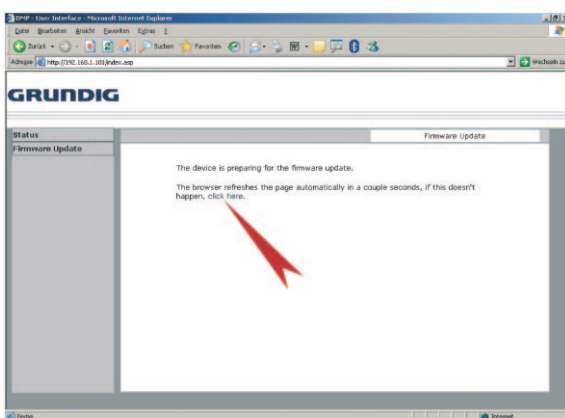


pict.3

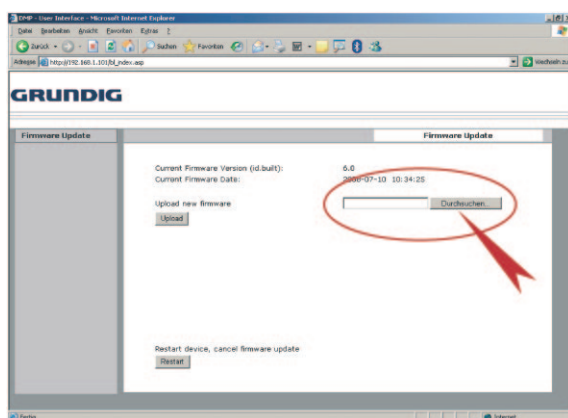


pict.4

The necessary files can be selected with "Search" and activated with "Upload". It appears a new site, which you have to confirm for safety with "OK" (pict. 5/6).

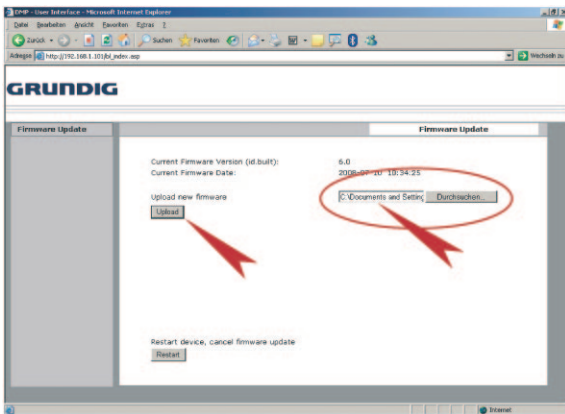


pict.5

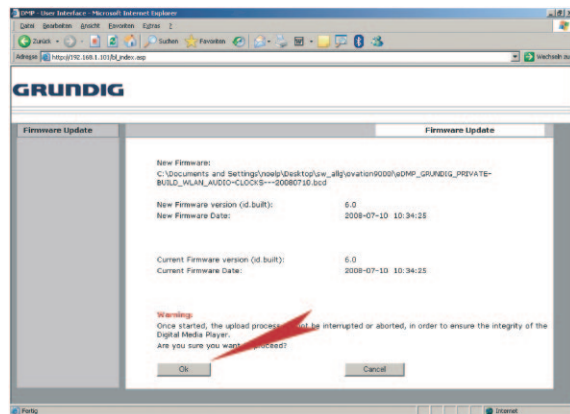

pict.6


During this update don't switch off the unit and don't separate this from the power (see also hint on this site pict. 7), because it could be possible that the unit will be damaged.

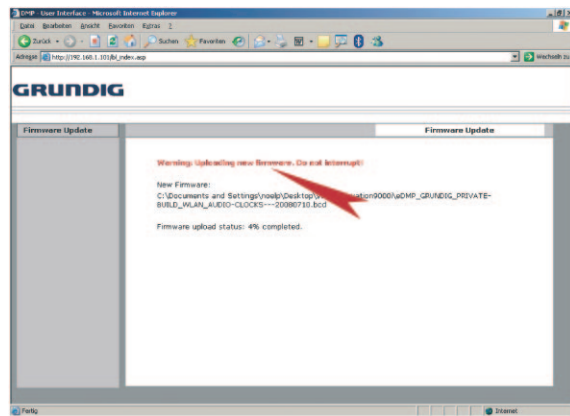

pict.7



pict.8

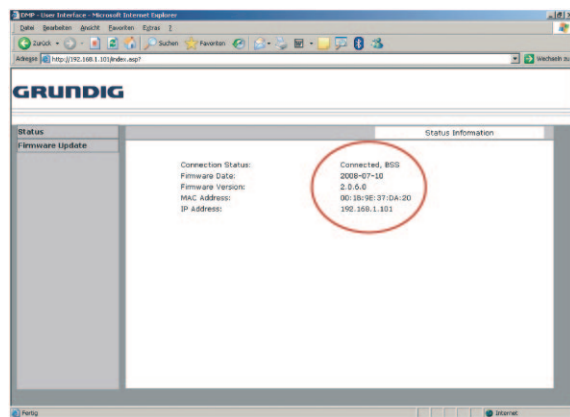

pict.9

You can see the course of the update in this status site and the success is displayed with "The upload process finished successfully" (pict. 8). The new software version can be displayed with "OK".

It could be possible, it depends of the software version, that you must adjusted new the network configuration.